


USER MANUAL

HOPSON 10PD 38.219.11

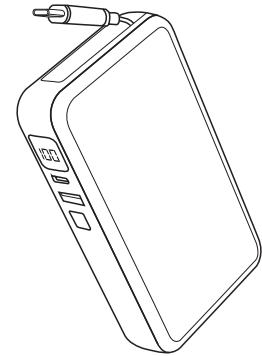

It is recommended to read this user manual carefully and keep it for future reference.

PRODUCT OVERVIEW



1. Retractable Type-C input/output cable
2. Power display
3. Type-C input/output port
4. USB-A output port
5. Power button

SPECIFICATION

Battery Capacity: 3.85V/10000mAh/38.5Wh(5000mAh*2)
 Type-C Port/Retractable Type-C Cable Input:
 5V=3A, 9V=2.22A,12V=1.67A
 Type-C Port/Retractable Type-C Cable Output:
 5V=3A, 9V=2.22A, 12V=1.67A, 10V=2.25A
 PPS: 5V-11V=2A Max
 USB-A Output: 5V=3A, 9V=2A, 12V=1.5A, 10V=2.25A
 Total Output: 5V=3A
 Retractable length: 75 cm
 Materials: Recycled PC/ABS/TPE/Aluminum/Tin
 Dimensions: 115*65*24 mm
 Product Weight: About 213g
 Charging time: About 3h (PD20W Adapter)
 Charging And Discharging at the same time: Yes

PROTECTIVE CIRCUIT

Input over voltage protection
 Output over current protection
 short circuit protection
 Battery over charge/discharge protection
 IC over temperature protection
 Battery temperature abnormal NTC protection when charge and discharge

TEMPERATURE RANGE

Using temperature range: 0~40°C
 Storage: -20~25°C (12 months)
 -20~45°C (3 months)

USAGE GUIDELINE

CHARGING YOUR POWER BANK

Connect the Type-C port with your own Type-C cable and another end to wall charger to charge it. Or connect the retractable Type-C cable to wall charger to charge it. The figure will flash, green symbol means fast charging. It is fully charged when display screen turn off.

CHARGING YOUR DEVICES

Connect your device to power bank with your own cable or the retractable cable, charging will start automatically, display screen keeps on, green symbol means fast charging.

LOW CURRENT CHARGING MODE FOR EARPHONE /HEADPHONE:

Before you activate this mode, you need to connect the power bank to your device via cable. Short press the power button for 2 times to activate the low-current charging mode, the figure will flash. You can short press the power button for 1 time to exit low-current charging mode. Or this mode will exit automatically after 2 hours.

WARNNING


1. Please do not strike the product with any blunt or sharp article. Do not throw or drop this product to avoid causing damages.
2. when the power empty, please charge it in time and avoid the product without power in long time storage.
3. It must be used with the correct voltage to avoid damage to the product and associated equipment.
4. The suppliers assume no responsibility for any damages that may happen with the improper operation of this product.
5. If no power output from the product, you just need to recharge it to make it back to normal.
6. Keep this product in a dry place. Never place or use the product in wet or dirty conditions.
7. Do not throw this product into a fire.
8. Never let children to play with it, especially for the accessories.
9. Please do not disassemble and refit our products to change the protection system, it may cause fire or explosion.
10. Please stop using this product if any abnormalities occur, such as abnormal smell, overheat, discolor or shape change.
11. Please do not pull in and out with strong force to avoid the damage to the socket and your devices.
12. It is normal that product will become hot after keep using for a long time.
13. After finished charging your devices, please remove the charging cable to avoid consuming the capacity of this product.
14. This product has built-in lithium battery, please use carefully.
15. The designer of this product has the final judgment and the right to amend all mentioned above.
16. Replacement of a battery with an incorrect type that can defeat a safeguard (for example, in the case of some lithium battery types);

WARNNING

17. Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;
18. Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas;
19. A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas

UPUTSTVO

HOPSON 10PD 38.219.11

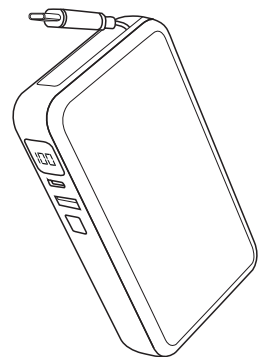

Preporučuje se da pažljivo pročitate ovaj korisnički priručnik i sačuvate ga za buduću upotrebu.

DIJAGRAM PROIZVODA



1. Type-C ulazno/izlazni kabl na izvlačenje
2. Indikator napunjenosti
3. Type-C ulazno/izlazni port
4. USB-A izlazni port
5. Dugme za uključivanje

PARAMETRI PROIZVODA

Kapacitet baterije: 3.85V/10000mAh/38.5Wh(5000mAh*2)
 Type-C port / izvlačivi Type-C kabl ulaz:
 5V=3A, 9V=2.22A, 12V=1.67A
 Type-C port / izvlačivi Type-C kabl izlaz:
 5V=3A, 9V=2.22A, 12V=1.67A, 10V=2.25A
 PPS: 5V-11V=2A Max
 USB-A izlaz: 5V=3A, 9V=2A, 12V=1.5A, 10V=2.25A
 Ukupni izlaz: 5V=3A
 Dužina izvlačenja kabla: 75 cm
 Materijali: Reciklirani PC/ABS/TPE/Aluminij/Tin
 Dimenzije: 115*65*24 mm
 Težina proizvoda: Oko 213g
 Vreme punjenja: Oko 3h (PD20W Adapter)
 Istovremeno punjenje i pražnjenje: Da

ZAŠTITNI SKLOP

Zaštita od prenapona na ulazu
 Zaštita od prevelike struje na izlazu
 Zaštita od kratkog spoja
 Zaštita baterije od prekomernog punjenja i pražnjenja
 Zaštita IC kola od pregrevanja
 NTC zaštita od abnormalne temperature baterije tokom punjenja i pražnjenja

RASPON TEMPERATURE

Radni temperaturni opseg: 0~40°C
 Skladištenje: -20~25°C (12 meseci)
 -20~45°C (3 meseca)

PREGLED PROIZVODA

PUNJENJE EKSTERNE BATERIJE

Povežite Type-C port power bank-a sa zidnim punjačem pomoću svog Type-C kabla. Alternativno, možete koristiti integrirani izvlačivi Type-C kabl i povezati ga direktno sa zidnim punjačem. Broj na ekranu će treperiti, a zeleni simbol označava brzo punjenje. Power bank je u potpunosti napunjen kada se ekran ugasi.

PUNJENJE VAŠIH UREĐAJA

Povežite uređaj sa power bank-om pomoću svog kabla ili integriranog izvlačivog kabla. Punjenje će započeti automatski, ekran će ostati uključen, a zeleni simbol označava brzo punjenje.

REŽIM PUNJENJA NISKOM STRUJOM ZA SLUŠALICE

Pre aktiviranja ovog režima, potrebno je da povežete power bank sa uređajem pomoću kabla. Dvaput kratko pritisnite dugme za napajanje kako biste aktivirali režim punjenja niskom strujom — broj na ekranu će treperiti. Za izlazak iz ovog režima, kratko pritisnite dugme za napajanje jednom, ili će se režim automatski isključiti nakon 2 sata.

UPOZORENJE

1. Molimo vas da ne udarate proizvod tupim ili oštrim predmetima. Ne bacajte i ne ispuštajte proizvod kako biste izbegli oštećenja.
2. Kada se baterija isprazni, blagovremeno je napunite i izbegavajte dugotrajno skladištenje proizvoda bez napunjenosti.
3. Proizvod se mora koristiti sa odgovarajućim naponom kako bi se izbegla oštećenja proizvoda i povezane opreme.
4. Dobavljač ne preuzima odgovornost za bilo kakvu štetu nastalu usled nepravilnog korišćenja ovog proizvoda.
5. Ako proizvod ne daje izlazno napajanje, potrebno je samo da ga ponovo napunite kako bi se vratio u normalan rad.
6. Držite proizvod na suvom mestu. Nikada ga ne postavljajte niti koristite u vlažnim ili prljavim uslovima.
7. Ne bacajte proizvod u vatru.
8. Ne dozvoljavajte deci da se igraju ovim proizvodom, posebno njegovim dodacima.
9. Nemojte rastavljati niti prepravljati proizvod radi izmene zaštitnog sistema, jer to može izazvati požar ili eksploziju.
10. Prestanite da koristite proizvod ako se pojave bilo kakve nepravilnosti, kao što su neobičan miris, pregrevanje, promena boje ili deformacija.
11. Ne izvlačite i ne uvlačite kablove ili konektore jakom silom kako biste izbegli oštećenje priključaka i vaših uređaja.
12. Normalno je da se proizvod zagreje nakon duže neprekidne upotrebe.
13. Nakon završetka punjenja vaših uređaja, isključite kabl za punjenje kako biste izbegli nepotrebno trošenje kapaciteta proizvoda.
14. Ovaj proizvod sadrži ugrađenu litijumsku bateriju, koristite ga sa oprezom.
15. Dizajner ovog proizvoda zadržava pravo konačnog tumačenja i izmene svih gore navedenih stavki.

UPOZORENJE

16. Zamena baterije neodgovarajućim tipom, kojom se može ugroziti bezbednosna zaštita (na primer kod određenih tipova litijumskih baterija).
17. Bacanje baterije u vatru ili u zagrejanu pećnicu, ili mehaničko drobljenje ili sečenje baterije, može izazvati eksploziju.
18. Ostaviti bateriju u okruženju sa ekstremno visokom temperaturom može izazvati eksploziju ili curenje zapaljive tečnosti ili gasa.
19. Baterija izložena ekstremno niskom vazдушnom pritisku može izazvati eksploziju ili curenje zapaljive tečnosti ili gasa.