


ENG

User Manual
INTER CHARGER 25W
38.206.10

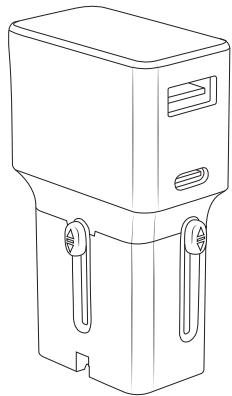

Universal travel wall
charger 25W
GaN Technology

- 1. Product Overview
- 1-1 Introduction
- 1-2 Accessories
- 2. Appearance Description
- 2-1 Technical Parameters
- 2-2 Protection
- 2-3 Material
- 2-4 Appearance and Interface
- 3. Operation Instructions

Thank you for choosing our products.
Please read carefully our User Manual before using it,
if you have any problem when using, please contact our
customer service, we'll solve it as soon as possible.
And any suggestion warm welcomed.


- 1.Product Overview**
- 1-1 Introduction
- 1. Inter Charger 25W
- 2. USB-C Output: 5V/3A, 9V/2.77A, 12V/2.08A(25W Max)
- 3. USB-A Output: 5V/3A, 9V/2A, 12V/1.5A
- 4. USB-C+USB-A Output: 5V/3A
- 5. Elegant, durable, heat eliminable.
- 6. Over-load, over-voltage, over-current and short circuit protection.
- 7. Compact and unique appearance design by our own, without any gap.
- 8. Guaranteed Safety: Premium materials and built-in fail-safes keep you and your device protected against shorts.

Input: 100-240V~ 50/60Hz, 0.8A
USB-C Output: 5V≡3A or 9V≡2.77A or 12V≡2.08A
USB-A Output: 5V≡3A or 9V≡2A or 12V≡1.5A
USB-C+USB-A Output: 5V≡3A
Total Output: 25W Max

- 1-2 Accessories
- 25W 2 ports USB CHARGER 1PCS
- Color box 1PCS
- User Manual 1PCS

- 2. Appearance Description**
- 2-1 Technical Parameters
- Input Voltage: 100-240V~ 50/60Hz 0.8A
- USB-C Output: 5V/3A,9V/2.77A, 12V/2.08A(25W Max)
- USB-A Output: 5V/3A, 9V/2A, 12V/1.5A
- USB-C+USB-A Output: 5V/3A
- Max Power: 25W Max
- 2-2 Protection
- Output Short Circuit Protect: on short circuit protection situation, our item will stop charging to protect devices.
- Over Voltage Protection: protection system will be started

- 2-3 Material
- Plastic Housing: PC+ABS+Fireproof material
- 2-4 Appearance and Interface

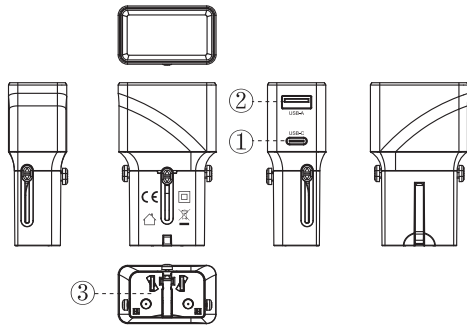

- ① USB-C Output: 5V/3A, 9V/2.77A, 12V/2.08A(25W Max)
- ② USB-A Output: 5V/3A, 9V/2A, 12V/1.5A
- USB-C+USB-A Output: 5V/3A
- ③ Connect to alternating current.




- 3. Operation Instruction**
- As above picture showed, connect to alternating current AC 100-240V, then 20W 2 ports PD3.0 Charger will work. If without loading, its internal consumption is about <300mW.

⚠ Our item is suitable to use in AC 100-240V constant alternating current, if higher or lower voltage is unsuitable



SRB

Uputstvo za
upotrebu
INTER CHARGER 25W
38.206.10

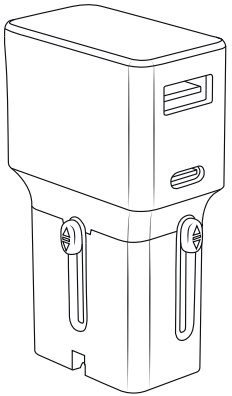

Univerzalni putni
zidni punjač 25W
GaN Tehnologija

- 1. Pregled proizvoda
- 1-1 Uvod
- 1-2 Dodaci
- 2. Fizičke karakteristike
- 2-1 Tehnički parametri
- 2-2 Zaštita
- 2-3 Materijal
- 2-4 Izgled i priključci
- 3. Uputstvo za upotrebu

Hvala što ste izabrali naše proizvode.
Molimo Vas da pažljivo pročitate naše uputstvo za upotrebu pre korišćenja. Ukoliko imate bilo kakvih problema tokom korišćenja, molimo Vas da kontaktirate našu korisničku službu, i mi ćemo ih rešiti što je pre moguće. Bilo kakve sugestije su dobrodošle.


- 1.Pregled proizvoda**
- 1-1 Uvod
- 1. Inter Charger 25W
- 2. USB-C Izlaz: 5V/3A, 9V/2.77A, 12V/2.08A(25W Max)
- 3. USB-A Izlaz: 5V/3A, 9V/2A, 12V/1.5A
- 4. USB-C+USB-A Izlaz: 5V/3A
- 5. Elegantno, izdržljivo, bez zadržavanja toplote.
- 6. Zaštita od preopterećenja, prenapona, prekomerne struje i kratkog spoja.
- 7. Kompaktan i jedinstven dizajn, bez ikakvih praznina.
- 8. Garantovana bezbednost: Kvalitetni materijali i ugrađene zaštite koje štite Vas i Vaš uređaj od kratkog spoja.

Ulaz: 100-240V~ 50/60Hz, 0.8A
USB-C Izlaz: 5V≡3A ili 9V≡2.77A ili 12V≡2.08A
USB-A Izlaz: 5V≡3A ili 9V≡2A ili 12V≡1.5A
USB-C+USB-A Izlaz: 5V≡3A
Ukupna izlazna snaga: 25W Max

- 1-2 Dodaci
- USB punjač sa 2 porta, 25W – 1 komad
- Kutija u boji – 1 komad
- Uputstvo za upotrebu – 1 komad

- 2. Fizičke karakteristike**
- 2-1 Tehnički parametri
- Ulazni napon: 100-240V~ 50/60Hz 0.8A
- USB-C Izlaz: 5V/3A, 9V/2.77A, 12V/2.08A(25W Max)
- USB-A Izlaz: 5V/3A, 9V/2A, 12V/1.5A
- USB-C+USB-A Izlaz: 5V/3A
- Maksimalna snaga: 25W Max
- 2-2 Zaštita
- Zaštita od kratkog spoja na izlazu: U slučaju kratkog spoja, naš uređaj će prestati sa punjenjem kako bi zaštitio uređaje.
- Zaštita od previsokog napona: Automatska zaštita će biti aktivirana.

- 2-3 Material
- Kućiste: PC+ABS+vatrootporan materijal.
- 2-4 Izgled i priključci

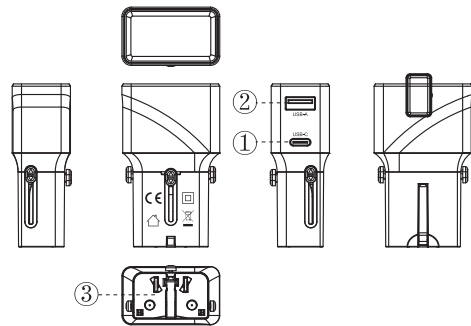

- ① USB-C Izlaz: 5V/3A, 9V/2.77A, 12V/2.08A(25W Max)
- ② USB-A Izlaz: 5V/3A, 9V/2A, 12V/1.5A
- USB-C+USB-A Izlaz: 5V/3A
- ③ Priključite na naizmeničnu struju.



- 3. Uputstvo za upotrebu**
- Kao što je prikazano na slici, priključite na naizmeničnu struju AC 100-240V, tada će punjač sa 2 PD3.0 porta od 20W početi da radi. Ako nema priključenih uređaja, njegova interna potrošnja je <300 mW.

⚠ Naš uređaj je pogodan za upotrebu na naizmeničnoj struji (AC) od 100-240V konstantnog napona. Upotreba pri nižem ili višem naponu nije preporučena.

